



1 = BLUE 2 = BROWN

3 = GREY 4 = GREEN/YELLOW

mini fast. FOUNDATION™ fieldbus

SPECIFICATIONS					
CONTACT CARRIER MATERIAL	TPU				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED				
RATED CURRENT [A]	9.0 A				
RATED VOLTAGE [V]	600 V				
CONDUCTOR INSULATION MATERIAL	PVC				
NUMBER OF CONDUCTORS [AWG]	4x18 AWG				
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)				
PROTECTION CLASS	NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K				



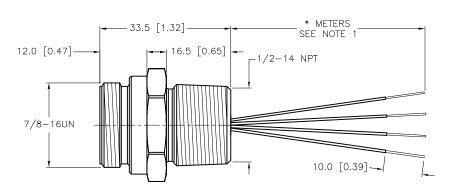

CABLE LENGTH	TOLERANCE *			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE *			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNLESS OTHERWISE SPECIFIED				

NOTES:

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. "/C1117" INDICATES 4-WIRE RECEPTACLE

\circ	UPDATE PROTECTION CLASS	СВМ	04/13/21	76628
REV	DESCRIPTION	BY	DATE	ECO NO.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		RC	(763) (763)	LIS, MN -544-7 553-7	55441 769 300 708 fax
MATERIAL		DRFT KMY	DATE 10/26/11	DESCRIPTION RSFV	49-*M/14.5/C	1117	
	ALL DIMENSIONS DISPLAYED ON THIS	APVD T.S.	SCALE 1=1.0	1.01 v	13 101/ 11.5/ 0	,	
- FINION	DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT		IDENTIFICATION NO.			
FINISH		MILLIMETER [INCH]					C
		DO NOT SCALE	THIS DRAWING	FILE: 777028261		SHEET	1 OF 1