


# Q45BB6CV W/30 Photoelectric Sensor – Convergent Mode Sensor






Туре	Q45BB6CV W/30
ID	3038476
Optical data	
Function	Proximity switch
Operating mode	Convergent
Light type	Red
Wavelength	680 nm
Focal distance	38 mm
Range	38 mm
Electrical data	
Operating voltage	1030 VDC
Residual ripple	< 10 % U <sub>ss</sub>
No-load current	≤ 50 mA
Short-circuit protection	yes
	· · · · · · · · · · · · · · · · · · ·
Reverse polarity protection	yes
Reverse polarity protection  Output function	yes NO contact, PNP/NPN
	<u> </u>
Output function	NO contact, PNP/NPN
Output function Switching frequency	NO contact, PNP/NPN ≤ 250 Hz
Output function Switching frequency Readiness delay	NO contact, PNP/NPN ≤ 250 Hz ≤ 100 ms
Output function Switching frequency Readiness delay Response time typical	NO contact, PNP/NPN ≤ 250 Hz ≤ 100 ms < 2 ms
Output function Switching frequency Readiness delay Response time typical Overcurrent release	NO contact, PNP/NPN  ≤ 250 Hz  ≤ 100 ms  < 2 ms  > 220 mA
Output function Switching frequency Readiness delay Response time typical Overcurrent release Setting option	NO contact, PNP/NPN  ≤ 250 Hz  ≤ 100 ms  < 2 ms  > 220 mA
Output function Switching frequency Readiness delay Response time typical Overcurrent release Setting option Mechanical data	NO contact, PNP/NPN  ≤ 250 Hz  ≤ 100 ms  < 2 ms  > 220 mA  Potentiometer
Output function Switching frequency Readiness delay Response time typical Overcurrent release Setting option Mechanical data Design	NO contact, PNP/NPN  ≤ 250 Hz  ≤ 100 ms  < 2 ms  > 220 mA  Potentiometer  Rectangular, Q45
Output function Switching frequency Readiness delay Response time typical Overcurrent release Setting option Mechanical data Design Dimensions	NO contact, PNP/NPN  ≤ 250 Hz  ≤ 100 ms  < 2 ms  > 220 mA  Potentiometer  Rectangular, Q45  Ø 30 x 56.4 x 44.5 x 87.6 mm

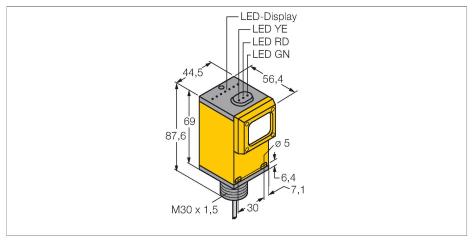

#### **Features**

- Cable, PVC, 2 m
- ■Protection class IP67
- Sensitivity adjusted via potentiometer
- Operating voltage: 10...30 VDC
- Switching output, bipolar
- Light or dark operation, adjusted via switch

### Wiring diagram



## Functional principle


Convergent mode sensors are equipped with a lens in front of the emitter diode that produces a small and intense focal point at a defined distance from the sensor. Similar to diffuse mode sensors, the light reflected by the target is evaluated. Convergent mode sensors are ideal for detection of small targets or colour marks and edge guiding or positioning control of transparent materials. The targets must always be within the focal depth of the sensors. The focal depth is defined as the area in front of or behind the focal point within which the object can be detected. Based on the intense light concentration in the focal point, convergent mode sensors are capable of detecting targets with a low reflectivity.

Excess gain curve
Excess gain in relation to the distance



## Technical data

Number of cores	4
Core cross-section	0.34 mm²
Ambient temperature	-40+70 °C
Protection class	IP67
Special features	keep/defer
Power-on indication	LED, Green
Switching state	LED, Yellow
Error indication	LED, green, Flashing
Excess gain indication	LED, red
Tests/approvals	
MTTF	67 years acc. to SN 29500 (Ed. 99) 40 °C
Approvals	CE, cURus, CSA



### Accessories

SMB30A

3032723

Mounting bracket, rectangular stainless steel, for sensors wit thread

6,3 wide

6,3 wide

7,5

3032723

Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread

SMB30FAM10

Mounting bracket, stainless steel, for M10 x 1.5 thread, thread length 30 mm

3011185

Mounting bracket, PBT black, for sensors with 30 mm thread, rotatable

3052521