



# IP-Link için piconet Uzatma Modülü 8 Digital PNP Inputs Filter 3 ms SNNE-0800D-0004

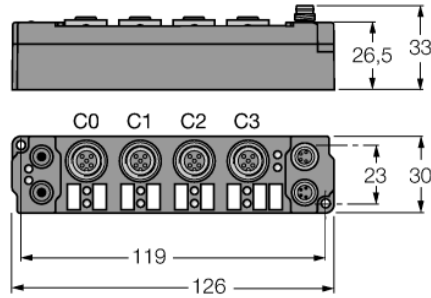


- Direct connection to the IP link
- Fibre-glass reinforced housing
- Encapsulated module electronics
- Metal connector
- Degree of protection IP67

## M12 × 1 Giriş



## M8 × 1 Güç Besleme



|                               |                                     |
|-------------------------------|-------------------------------------|
| Tip                           | SNNE-0800D-0004                     |
| Tanıt. no.                    | 6824203                             |
| Kanal sayısı                  | 8                                   |
| Operating / load voltage      | 20...29 VDC                         |
| Operating current             | ≤ 25 mA                             |
| Fibre-optic length            | ≤ 15 m                              |
| Number of channels            | 8 digital inputs acc. to EN 61131-2 |
| Input voltage                 | 20...29 VDC via operating voltage   |
| Düşük seviye sinyal gerilimi  | -3...5 VDC (EN 61131-2, type 2)     |
| Yüksek seviye sinyal gerilimi | 11...30 VDC (EN 61131-2, type 2)    |
| Giriş gecikmesi               | 3 ms                                |
| Maks. giriş akımı             | 6 mA                                |
| Boyutlar (W x L x H)          | 30 x 126 x 26.5 mm                  |
| Titreşim testi                | EN 60068-2-6 uyarınca               |
| Darbe testi                   | acc. to DIN EN 60068-2-27           |
| Elektromanyetik uyumluluk     | EN 61000-6-2/EN 61000-6-4 uyarınca  |
| IP Derecesi                   | IP67                                |
| Onaylar                       | CE, cULus                           |

Data in process image

|                                                                                                                                                                           |       |                | Bit 7                                                                                        | Bit 6 | Bit 5 | Bit 4 | Bit 3                                                                                        | Bit 2 | Bit 1 | Bit 0 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------------|----------------------------------------------------------------------------------------------|-------|-------|-------|----------------------------------------------------------------------------------------------|-------|-------|-------|
| Valid, if the coupling module parameter byte alignment is disabled (default) and byte n has been used halfway. Up to 8 bit input data are mapped.                         | Input | Byte n (M8)    | C3P4                                                                                         | C2P4  | C1P4  | C0P4  | is used by the physically preceding bit-oriented extension module connected via the IP Link. |       |       |       |
|                                                                                                                                                                           |       | Byte n (M12)   | C1P2                                                                                         | C1P4  | C0P2  | C0P4  |                                                                                              |       |       |       |
|                                                                                                                                                                           |       | Byte n+1 (M8)  | is used by the physically following bit-oriented extension module connected via the IP Link. |       |       |       | C7P4                                                                                         | C6P4  | C5P4  | C4P4  |
|                                                                                                                                                                           |       | Byte n+1 (M12) |                                                                                              |       |       |       | C3P2                                                                                         | C3P4  | C2P2  | C2P4  |
| Valid, if the coupling module parameter byte alignment is active or disabled (default) and the previous byte has been completely used. Up to 8 bit input data are mapped. | Input | Byte n (M8)    | C7P4                                                                                         | C6P4  | C5P4  | C4P4  | C3P4                                                                                         | C2P4  | C1P4  | C0P4  |
|                                                                                                                                                                           |       | Byte n (M12)   | C3P2                                                                                         | C3P4  | C2P2  | C2P4  | C1P2                                                                                         | C1P4  | C0P2  | C0P4  |

C... = Connector no. – P... = Pin no.