


excom I/O System

4-Channel Temperature Input Module

TI401-N

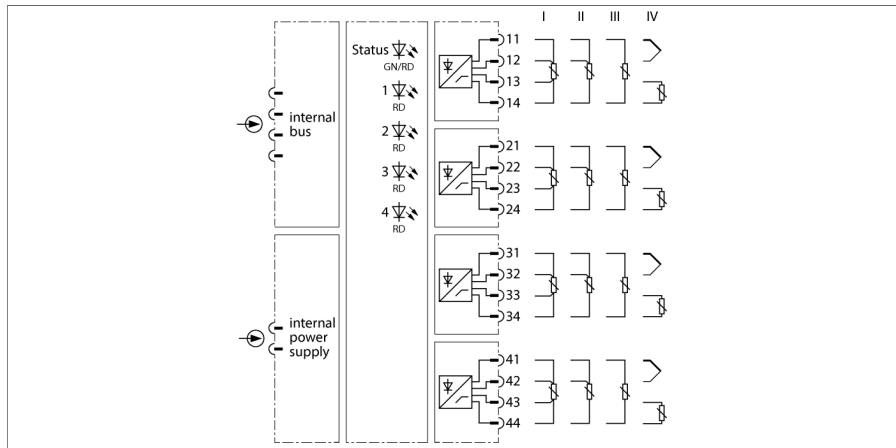

The input module TI401-N is used for the connection of 2, 3 and 4-wire temperature probes of the types Pt100, Pt200, Pt500, Pt1000, Ni100 and Cu100, as well as for the connection of thermocouples of the types B, E, D, J, K, L, N, R, S, T and U. The module can also be used for the measurement of low voltages (-75...+75 mV, -1.2...+1.2 V) and for resistance measurements (0...30 Ω , 0...300 Ω , 0...3 k Ω).

Line compensation of 2-wire temperature resistors is done by means of parametrized resistance values. These values have to be determined first through measurements.

When using thermocouples, external cold junction compensation can be carried out separately for each channel by connecting an RTD (2-wire) to the two unused terminals. Instead, internal compensation is parameterized for all channels via an integrated temperature resistor.

The temperature is indicated in Kelvin. For conversion to °C, please observe an offset of 273.2.


Setting the parameters, such as line monitoring, substitute value strategy and attenuation, can be carried out channel-by-channel and is initiated exclusively by the master.

- Input module for connecting temperature sensors, thermocouples, low voltages and resistor elements
- Complete galvanic isolation



Dimensions

Type	TI401-N
ID	100028779
Supply voltage	Via module rack, central power supply module
Power consumption	≤ 1 W
Power dissipation	≤ 0.5 W
Galvanic isolation	Complete galvanic isolation
Number of channels	4
Input circuits	Pt100 Pt200 Pt500 Pt1000 Ni100 Cu100 0...30 ohms 0...300 ohms 0...3 kilohms Thermocouples: B, C, D, E, J, K, L, L (GOST), N, R, S, T, U Low voltages: -75...+75 mV, -1.2...+1.2 V
Reference temperature	25 °C
Resolution	0.1 K (RTD and TC) 5 µV (±75 mV) 100 µV (±1.2 V) 1 mΩ (0...30 Ω) 10 mΩ (0...300 Ω) 100 mΩ (0...3000 Ω)
Measuring accuracy (including linearity, hysteresis and repeatability)	RTD: ≤ 0.1 % of measuring span. Thermocouple type: E, K, J, L, N, T, U ≤ 0.1 % of measuring span Thermocouple type: D, R, S ≤ 0.2 % of measuring span Thermocouple type: B ≤ 0.5 % of measuring span
Linearity deviation	≤ 0.05 % measuring range
Temperature drift	≤ 0.005 % of measuring span/K
Rise time/fall time	≤ 1.3 s (10...90 %)
Max. measurement tolerance under EMC influence	≤ 0.1 % with shielded signal cable
Ex approval acc. to conformity certificate	IECEx TUR 21.0012X
Ex approval acc. to conformity certificate	TÜV 21 ATEX 8643 X
Device designation	Ex II 3 G Ex ec IIC T4 Gc
Displays/Operating elements	
Operational readiness	1 × green/red
State/ Fault	4 × red



Housing material	Plastic
Connection mode	module, plugged on rack
Protection class	IP20
Ambient temperature	-40...+70 °C
Relative humidity	≤ 93 % at 40 °C acc. to IEC 60068-2-78
Vibration test	Acc. to IEC 60068-2-6
Shock test	Acc. to IEC 60068-2-27
EMC	Acc. to EN 61326-1 Acc. to Namur NE21
MTTF	62 years acc. to SN 29500 (Ed. 99) 40 °C
Dimensions	18 x 118 x 106 mm

Approvals	ATEX cFMus cFM IECEX CE
-----------	-------------------------------------

Accessories

Type code	Ident no.		Dimension drawing
TI-CJC-2 (10PCS)	6884209	Cold junction compensation element (Pt100) for thermocouples measuring with the TI40...	