


RJ45SF-RJ45SF-88

Adapter – Adapter and Wall Feedthrough

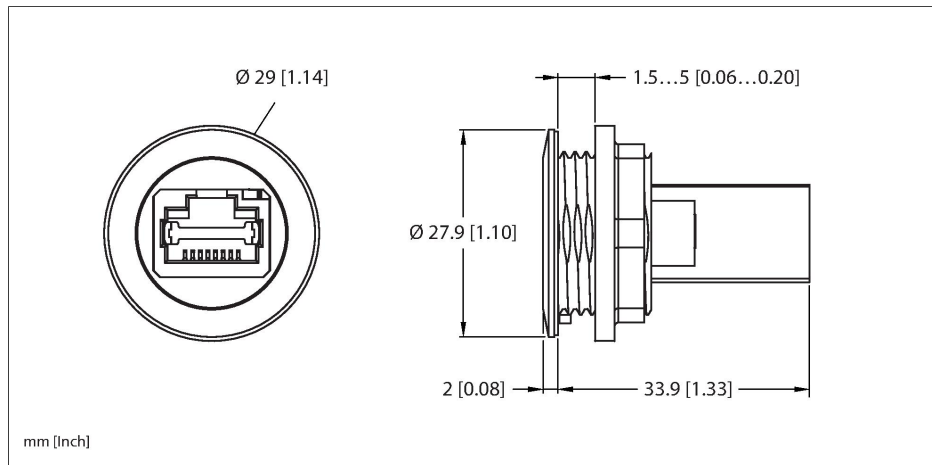

Technical data


Type	RJ45SF-RJ45SF-88
ID	100048230
Connector A	Female, RJ45, Straight
Number of pins	8
Contacts	Bronze, CuSn, Gold-plated
Contact carriers	Plastic, TPU, Black
Connector body	Plastic, PA, Black
Coupling nut/screw	Brass, CuZn
Mechanical lifespan	> 100 Mating cycles
Protection class	IP20, (screwed together)
Connector B	Female, RJ45, Straight
Number of Pins	8
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, TPU, Black
Coupling nut/retaining screw	Brass, CuZn, Nickel-plated
Tightening torque	0.6 ... 0.8 Nm
Mechanical life	> 100 Mating cycles
Protection class	IP20, (Screwed together)
Rated voltage	48 V
Current	1.5 A
Insulation resistance	$\geq 10^8 \Omega$
forward resistance	$\leq 5 m\Omega$
Ambient temperature (fixed)	-30...+80 °C
Approvals	UL Listed

Features



- Shielded, CAT6A
- RJ45 female connector, straight, 8-pin
- RJ45 female connector, straight, 8-pin
- RoHS compliant
- Protection class: IP20 (RJ45)
- UL

Accessories

Dimension drawing	Type	ID	
	VK-RJ45SF-88 (10PCS)	100048233	Verschlusskappe IP67 für RJ45 Adapter, Wanddurchführung, RJ45SF-RJ45SF-88