


R58ACG1Q

Photoelectric Sensor – Convergent Mode Sensor Color Mark Sensor

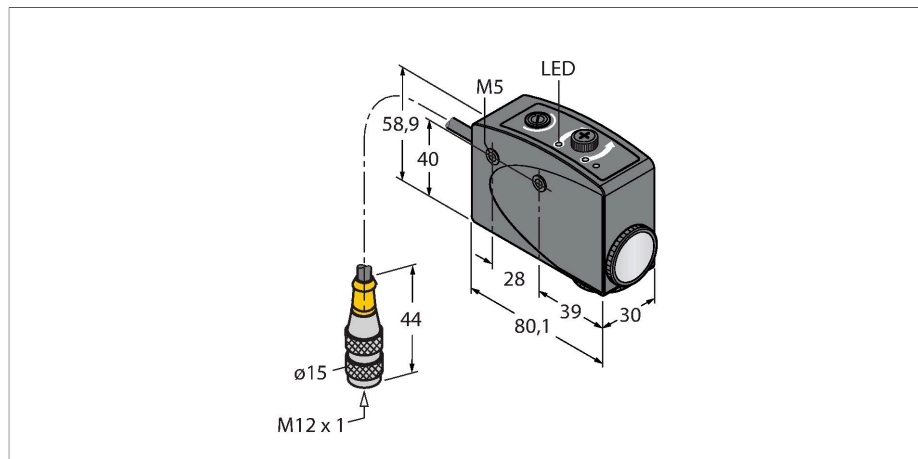



Features

- Cable with male end, PVC, 4-pin, 150 mm
- Protection class IP67
- Threshold adjusted via 15-turn potentiometer
- Light/dark operate adjusted via rotary switch
- Emits green light for detection
- Parallel scan field relative to the housing axis
- Optics rotatable by 90°
- Operating voltage: 10...30 VDC
- PNP/NPN switching output
- Switching behavior adjustable (NO/NC)

Technical data

Type	R58ACG1Q
ID	3010219
Optical data	
Function	Inspection sensor
Operating mode	Contrast sensor
Light type	Green
Focal distance	10 mm
Range	10 mm
Electrical data	
Operating voltage	10...30 VDC
Residual ripple	< 10 % U _{ss}
DC rated operational current	≤ 100 mA
No-load current	≤ 75 mA
Short-circuit protection	yes
Reverse polarity protection	yes
Output function	NO contact, PNP/NPN
Switching frequency	10 kHz
Readiness delay	≤ 100 ms
Setting option	Potentiometer
Mechanical data	
Design	Rectangular, R58
Dimensions	80.1 x 30 x 58.9 mm
Housing material	Metal, Zinc Alloy Die-Cast, Black-finished
Lens	plastic, Acrylic
Electrical connection	Cable with connector, M12 × 1, 0.15 m, PVC

Wiring diagram



Functional principle

The color mark sensor differentiates between all conventional color contrasts occurring in product and material registration. For this purpose it uses green light. The very short response time of 50 µs is ideally suited for high speed applications. The sensor's switchpoint is adjusted in 15 steps via potentiometer. Via rotary switch, the sensor can also be taught to differentiate between ON and OFF state.

