



Vision System ring light LEDUV395R70XD5-PM

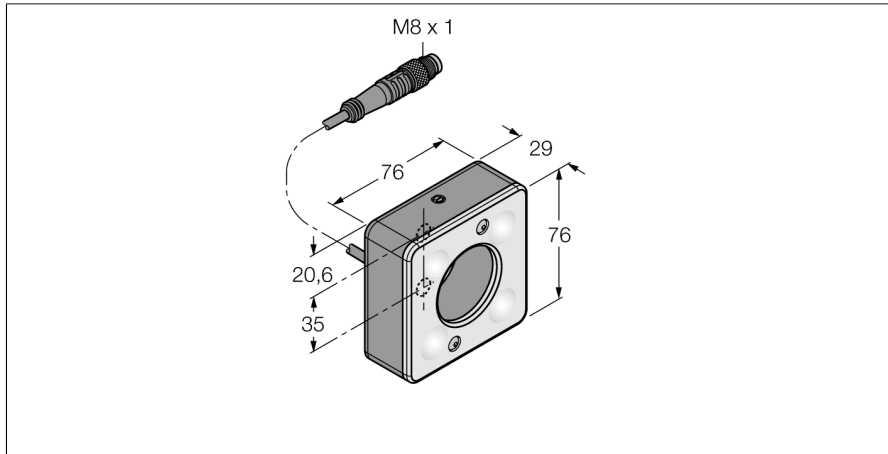

- High-Intensity
- Protection class: IP50
- Color: ultraviolet
- Light intensity, adjustable
- Power supply: 24 VDC
- Pigtail M8x1, 0.3m

Wiring Diagram



Type	LEDUV395R70XD5-PM
ID	3019881
Signal and display data	
Purpose	Image processing
Function	Area light
Light type	UV
Wavelength	395 nm
LED service life (L70)	50000 h
Dimmable	Yes
Features of color 1	UV
Electrical data	
Operating voltage U_o	24 VDC
DC rated operating current I_o	≤ 350 mA
Max. current consumption per color	350 mA
Mechanical data	
Design	Rectangular
Housing material	Metal, Anodized AL
Window material	Acrylic, diffuse
Electrical connection	Cable with connector, M8 × 1, 0.3 m, PVC
Number of cores	3
Ambient temperature	0...+50 °C
Protection class	IP50
Tests/approvals	
Approvals	CE, cULus listed

Functional principle

Directly mounted to the sensor for easy setup.
Illumination of objects directly in front of the sensor.