


Vision System

Linear Area Light

LEDUV395LA435AD6-XQ

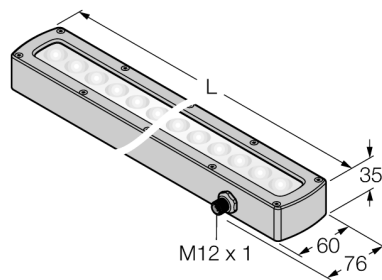

- High-Intensity
- Protection class: IP68
- Color: ultraviolet
- Power supply: 24 VDC
- M12 x 1 male

Wiring Diagram

BN (1)	+
BU (3)	-
WH (2) strobe (+)	
BK (4) strobe (-)	
GY (5) active high/ active low	

Functional principle

High-intense illumination of large areas at long distances.

Type	LEDUV395LA435AD6-XQ
ID	3019948
Signal and display data	
Purpose	Image processing
Function	Linear light
Light type	UV
Wavelength	395 nm
Beam angle	5°
LED service life (L70)	50000 h
Features of color 1	UV
Special features	Wash down
Electrical data	
Operating voltage U_s	24 VDC
DC rated operating current I_s	≤ 1500 mA
Max. current consumption per color	1500 mA
Mechanical data	
Design	Rectangular
Housing material	Metal, Nickel-plated aluminum
Window material	Plastic, diffuse
Electrical connection	Connector, M12 × 1, PVC
Number of cores	5
Ambient temperature	0...+50 °C
Protection class	IP68
Tests/approvals	
Approvals	CE, cULus listed