


# VS1RP5C20 Photoelectric Sensor – Convergent Mode Sensor Miniature Sensor

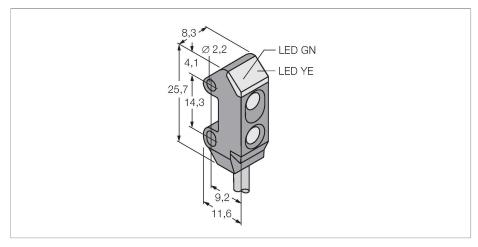


### Technical data

Туре	VS1RP5C20	
ID	3055300	
Optical data		
Function	Proximity switch	
Operating mode	Convergent	
Light type	IR	
Wavelength	865 nm	
Focal distance	15 mm	
Range	20 mm	
Electrical data		
Operating voltage	1030 VDC	
Residual ripple	< 10 % U <sub>ss</sub>	
DC rated operational current	≤ 50 mA	
No-load current	≤ 25 mA	
Short-circuit protection	yes	
Reverse polarity protection	yes	
Output function	NO contact, PNP	
Current output	050 mA	
Switching frequency	≤ 500 Hz	
Readiness delay	≤ 0 ms	
Response time typical	< 1 ms	
Mechanical data		
Design	Rectangular, VS1	
Dimensions	11.6 x 8.3 x 25.7 mm	
Housing material	Plastic, Thermoplastic material, Black	
Lens	plastic, Acrylic	

### **Features**

- Cable 2 m
- ■Very high excess gain
- Operating voltage: 10...30 VDC
- ■PNP switching output, dark operation


# Wiring diagram



# Functional principle

Convergent mode sensors are equipped with a lens in front of the emitter diode that produces a small and intense focal point at a defined distance from the sensor. Similar to diffuse mode sensors, the light reflected by the target is evaluated. Convergent mode sensors are ideal for detection of small targets or colour marks and edge guiding or positioning control of transparent materials. The targets must always be within the focal depth of the sensors. The focal depth is defined as the area in front of or behind the focal point within which the object can be detected. Based on the intense light concentration in the focal point, convergent mode sensors are capable of detecting targets with a low reflectivity. Excess gain curve

Excess gain in relation to the distance





## Technical data

Electrical connection	Cable, 2 m, PVC	
Number of cores	3	
Core cross-section	0.34 mm <sup>2</sup>	
Ambient temperature	-20+55 °C	
Protection class	IP54	
Power-on indication	LED, Green	
Switching state	LED, Yellow	
Error indication	LED, green, Flashing	
Excess gain indication	LED	
Tests/approvals		
Approvals	CE	

## Accessories

SMBVS1T	3055496	SMBVS1TC	3056795
	Mounting bracket, stainless steel, rectangular, for VS1		Mounting bracket, stainless steel, rectangular, for VS1
SMBVS1S	3055554	SMBVS1SC	3056797
	Mounting bracket, stainless steel, rectangular, for VS1		Mounting bracket, stainless steel, rectangular, for VS1