



Image Processing Camera P3 PPROCAM1.3SI-G



- Compact camera with integrated ring light
- Housing material aluminium
- Glas inspection window
- Protection class IP68
- Lens to be ordered separately
- Separate controller required, type PPROCTL
- 2/3" CMOS, 752x480 pixels
- 256 gray scale values

Wiring Diagram

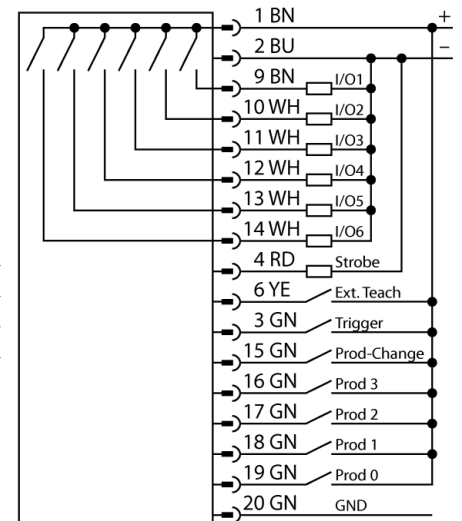

Functional principle

The image processing system PresencePLUS PRO consists of the compact camera and the processing unit incorporated in a separate controller. Lens, external/internal lighting and connection cable are to be ordered separately. Freeware and firmware updates are available for download on:

www.bannerengineering.com

Type	PPROCAM1.3SI-G
ID	3077048
Camera data	
Resolution	1280 × 1024 pixels
Light type	IR
Wavelength	850...940 nm
Brennweite	6 mm
Special features	Wash down
DC rated operating current I_e	
DC rated operating current I _e	≤ 550 mA
Communication protocol	
Communication protocol	EtherNet/IP
	Modbus TCP
	Modbus TCP
	PCCC
	RS232
Mechanical data	
Dimensions	Ø 104 x 143.3 mm
Housing material	Metal, Nickel-plated aluminum
Window material	Glass, clear
Ambient temperature	0...+50 °C
Protection class	IP68
Tests/approvals	
Approvals	CE