



LED Signal Light Beacon K80LGRYB4PQP

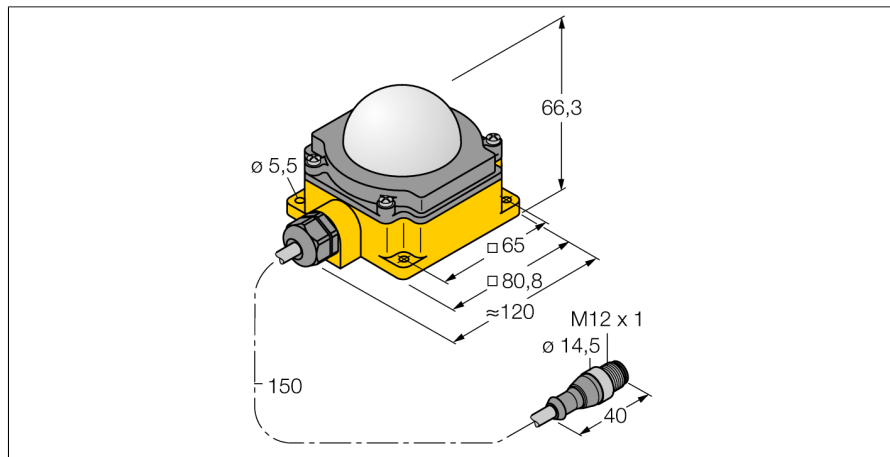

- Protection class IP67
- Cable with male end M12 x 1, 5-pin
- Operating voltage 18...30 VDC
- Protection class IP67

Wiring Diagram

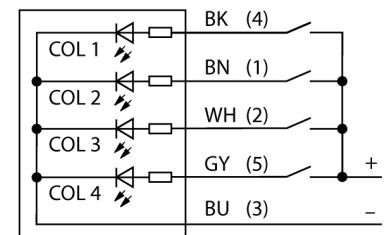

Type	K80LGRYB4PQP
ID	3077630
Signal and display data	
Purpose	LED indicator light
Function	Spotlight
Light type	Green Red Yellow Blue
Dimmable	No
Features of color 1	Green, Miscellaneous
Features of color 2	Red
Features of color 3	Yellow
Features of color 4	Blue
Operating voltage U _s	18...30 VDC
Max. current consumption per color	40 mA
Input type	PNP
Response time typical	< 10 ms
Mechanical data	
Cascadable	No
Design	Dome, K80L
Housing material	Plastic, PC, Yellow
Window material	Acrylic, diffuse
Electrical connection	Cable with connector, M12 × 1, 0.15 m, PVC
Number of cores	5
Ambient temperature	-40...+50 °C
Protection class	IP67
Tests/approvals	
Approvals	CE

Accessories

Type code	Ident no.		Dimension drawing
SMBDX80DIN	3077161	Mounting panel for DIN rail, suited for CP80, DX80, K80, Q80, operating temperature: -20...90 °C	