



LED Signal Light Beacon K80L2HRGXX1PQ

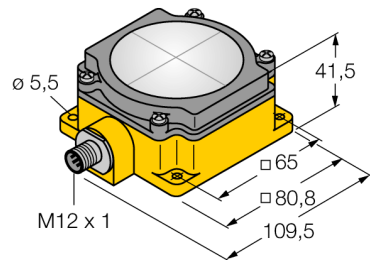

- M12 x 1 connector, male, 5-pin
- Segmented display area
- Horizontally divided
- Multicolor: Red (COL 1) / Green (COL 2)
- Operating voltage 18...30 VDC
- Protection class IP67

Wiring Diagram

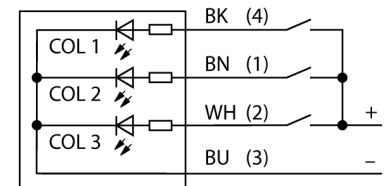

Type	K80L2HRGXX1PQ
ID	3078456
Signal and display data	
Purpose	LED indicator light
Function	Area light
Light type	Red Green
Dimmable	No
Features of color 1	Red, Miscellaneous
Features of color 2	Green
Electrical data	
Operating voltage U _a	18...30 VDC
Max. current consumption per color	90 mA
Input type	PNP
Response time typical	< 250 ms
Mechanical data	
Cascadable	No
Design	Rectangular, K80L
Housing material	Plastic, PC, Yellow
Window material	Acrylic, diffuse
Electrical connection	Connector, M12 × 1, PVC
Number of cores	5
Ambient temperature	-40...+50 °C
Protection class	IP67
Tests/approvals	
Approvals	CE

Accessories

Type code	Ident no.		Dimension drawing
SMBDX80DIN	3077161	Mounting panel for DIN rail, suited for CP80, DX80, K80, Q80, operating temperature: -20...90 °C	