


K50LGRA2YP

LED Signal Light – Beacon with Audible Signal




Technical data

Type	K50LGRA2YP
ID	3078809
Signal and display data	
Purpose	LED indicator light
Function	Spotlight
Light type	Green Red Yellow
Dimmable	No
Features of color 1	Green, Permanently on
Features of color 2	Red
Features of color 3	Yellow
Features of color 4	Yellow
Acoustic signal	Pulsed, 75 dB
Electrical data	
Operating voltage U_B	18...30 VDC
DC rated operating current I_o	≤ 40 mA
Max. current consumption per color	40 mA
Max. current consumption of beeper	40 mA
Input type	PNP
Response time typical	< 10 ms
Mechanical data	
Cascadable	No
Design	Dome, K50L
Dimensions	Ø 50 x 57 mm
Housing material	Plastic, PC ABS, Black

Features

- LED all-round visible
- Pulsed signal: 75dB
- Individually controllable
- Mechanical screw-in thread M30x1.5
- Protection class IP50
- Multicolor: Green (COL 1) / Red (COL 2) / Yellow (COL 3)
- Cable 2 m
- Operating voltage 18...30 VDC

Wiring diagram

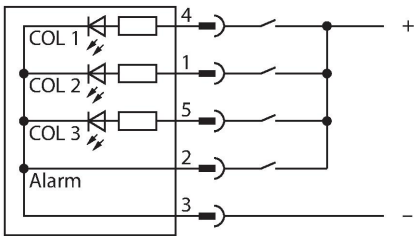


Functional principle

The rugged and IP50 rated LED is qualified for industrial environments. Depending on the connection, one of the three colors lights steady for the duration of a PNP input signal.

Technical data

Window material	Polycarbonate, diffuse
Electrical connection	Cable, 2 m, PVC
Number of cores	5
Ambient temperature	-20...+50 °C
Relative humidity	0...90 %
Protection class	IP50
Tests/approvals	
Approvals	CE, UL listed

Accessories

SMB30A	3032723	SMB30SC	3052521
 Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread		 Mounting bracket, PBT black, for sensors with 30 mm thread, rotatable	