



Vision System
Axial Lighting
LEDIO50M-D

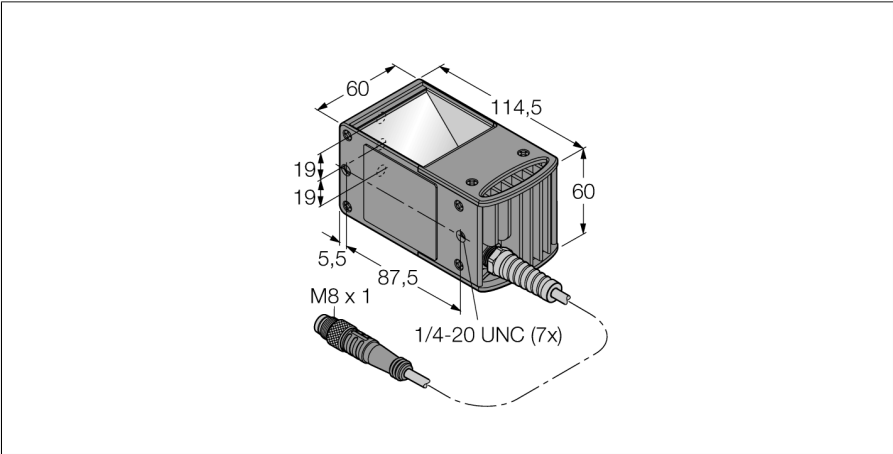

- Axial lighting
- Protection class: IP40
- Color: infrared
- Power supply: 24 VDC
- Pigtail M8x1, 0.6m

Wiring Diagram

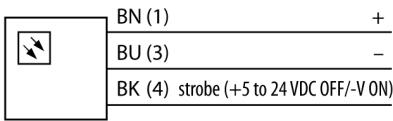

Functional principle

Illumination coaxially integrated in the camera's beam path.

Type	LEDIO50M-D
ID	3079053
Signal and display data	
Purpose	Image processing
Function	Area light
Light type	IR
Wavelength	850...940 nm
LED service life (L70)	20000 h
Electrical data	
Operating voltage U_o	24 VDC
DC rated operating current I_o	≤ 125 mA
Max. current consumption per color	125 mA
Mechanical data	
Design	Rectangular
Housing material	Metal, Anodized AL
Window material	Acrylic, clear
Electrical connection	Cable with connector, M8 $\times$ 1, 0.6 m, PVC
Number of cores	3
Ambient temperature	0...+50 °C
Protection class	IP40
Tests/approvals	
Approvals	CE, cULus listed