



LED Signal Light K50LDGRYN




- LED all-round visible
- Daylight viewable green LED
- Individually controllable
- Protection class IP67
- Multicolor: Green (COL 1) / Red (COL 2) / Yellow (COL 3)
- Cable, 2 m
- Operating voltage 15...30 VDC
- NPN input

Wiring Diagram

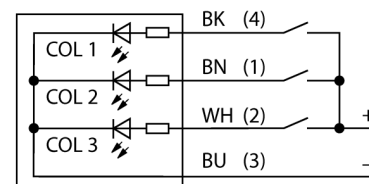

Type	K50LDGRYN
ID	3079723
Signal and display data	
Purpose	LED indicator light
Function	Spotlight
Light type	Green Red Yellow
Dimmable	No
Features of color 1	Green, Permanently on
Features of color 2	Red
Features of color 3	Yellow
Special features	Wash down
Electrical data	
Operating voltage U_a	15...30 VDC
DC rated operating current I_a	≤ 120 mA
Max. current consumption per color	40 mA
Input type	minus-schaltend
Response time typical	< 1 ms
Mechanical data	
Cascadable	No
Design	Puck, K50LD
Dimensions	Ø 50 x 38.5 mm
Housing material	Plastic, PC, Black
Electrical connection	Cable, 2 m, PVC
Number of cores	4
Ambient temperature	-40...+50 °C
Relative humidity	0...90%
Protection class	IP67
Tests/approvals	
Approvals	CE

Accessories

Type code	Ident no.		Dimension drawing
SMB30A	3032723	Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread	
SMB30SC	3052521	Mounting bracket, PBT black, for sensors with 30 mm thread, rotatable	