



LED Signal Light K50LDXWXP




- LED all-round visible
- Daylight viewable green LED
- Individually controllable
- Protection class IP67
- Monochrome: White (COL 2)
- Cable 2 m
- Operating voltage 15...30 VDC

Wiring Diagram

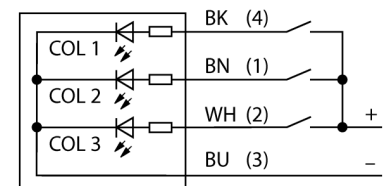

Type	K50LDXWXP
ID	3080423
Signal and display data	
Purpose	LED indicator light
Function	Spotlight
Light type	White
Dimmable	No
Features of color 1	White, Permanently on
Features of color 2	White
Special features	Wash down
Electrical data	
Operating voltage U_o	15...30 VDC
DC rated operating current I_o	≤ 120 mA
Max. current consumption per color	120 mA
Input type	PNP
Response time typical	< 1 ms
Mechanical data	
Cascadable	No
Design	Puck, K50LD
Dimensions	Ø 50 x 38.5 mm
Housing material	Plastic, PC, Black
Electrical connection	Cable, 2 m, PVC
Number of cores	4
Ambient temperature	-40...+50 °C
Relative humidity	0...90%
Protection class	IP67
Tests/approvals	
Approvals	CE

Accessories

Type code	Ident no.		Dimension drawing
SMB30A	3032723	Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread	
SMB30SC	3052521	Mounting bracket, PBT black, for sensors with 30 mm thread, rotatable	