

K50LGRYBWPQP8
LED Signal Light – Beacon



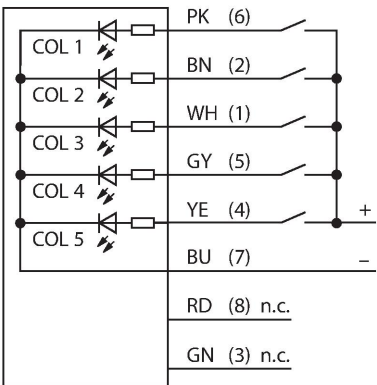
Technical data

Type	K50LGRYBWPQP8
ID	3081107
Signal and display data	
Purpose	LED indicator light
Function	Spotlight
Light type	Green Red Yellow Blue White
Dimmable	No
Features of color 1	Green, Miscellaneous
Features of color 2	Red
Features of color 3	Yellow
Features of color 4	Blue
Features of color 5	White
Special features	Wash down
Electrical data	
Operating voltage U_b	18...30 VDC
DC rated operating current I_o	≤ 40 mA
Max. current consumption per color	50 mA
Input type	PNP
Response time typical	< 250 ms
Mechanical data	
Cascadable	No
Design	Dome, K50L
Dimensions	Ø 50 x 58 mm
Housing material	Plastic, PC, Black

Features

- LED all-round visible
- Individually controllable
- Screw-in thread M30x1.5
- Protection class IP67
- Multicolor: Green (COL 1) / Red (COL 2) / Yellow (COL 3) / Blue (COL 4) / White (COL 5)
- Cable with male end M12 x 1
- Operating voltage 18...30 VDC



Wiring diagram



Technical data

Window material	Polycarbonate, diffuse
Electrical connection	Cable with connector, M12 × 1, 0.15 m, PVC
Number of cores	8
Ambient temperature	-40...+50 °C
Relative humidity	0...90 %
Protection class	IP67
Tests/approvals	
MTTF	249 years acc. to SN 29500 (Ed. 99) 40 °C
Approvals	CE, UL listed

Accessories

SMB30A	3032723	SMB30SC	3052521
 Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread		 Mounting bracket, PBT black, for sensors with 30 mm thread, rotatable	