


CL50ZW


LED Signal Light – Tower Light



Features

- LED tower light
- Individually controllable
- Mechanical screw-in thread M30x1.5
- Protection class IP67
- Monochrome: White (COL 1)
- Operating voltage: 85...264 VAC

Wiring diagram

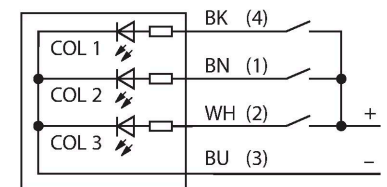

Technical data

Type	CL50ZW
ID	3085751
Signal and display data	
Purpose	LED indicator light
Function	Tower light
Light type	White
LED service life (L70)	50000 h
Dimmable	No
Features of color 1	White, Permanently on, 85 lm
Electrical data	
Operating voltage U_b	85...264 VAC
AC rated operational current	≤ 80 mA
Max. current consumption per color	60 mA
Input type	AC
Response time typical	< 500 ms
Mechanical data	
Cascadable	No
Design	Smooth barrel, CL50Z
Dimensions	$\varnothing 50 \times 183.2$ mm
Housing material	Plastic, ABS/Polycarbonate, Black
Window material	Polycarbonate, diffuse
Electrical connection	Cable, 2 m, PVC
Number of cores	4
Ambient temperature	$-40...+50$ °C
Relative humidity	0...95 %
Protection class	IP67

Functional principle

Multicolor/multifunction display
 Rugged and well-priced LED tower, easy to install
 Illuminated segments for clear operator guidance and display of system status.
 Display of up to 3 colors.
 Compact devices, no controller required
 No mounting

Technical data

Tests/approvals

Approvals	CE, UL listed
-----------	---------------