



# LED Area Light In the Metal Housing WLC90WL15R

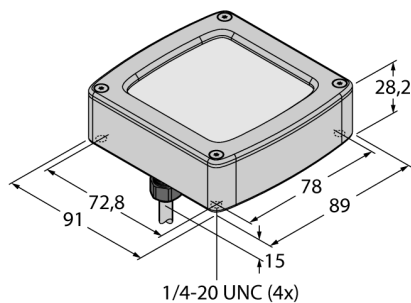

|      |            |
|------|------------|
| Type | WLC90WL15R |
| ID   | 3086531    |

|                         |                                                           |
|-------------------------|-----------------------------------------------------------|
| Signal and display data |                                                           |
| Purpose                 | LED work light                                            |
| Function                | Area light                                                |
| Light type              | White                                                     |
| Color temperature       | 6000...+7100K                                             |
| Luminous flux lumen     | 700 lm                                                    |
| Aperture angle degree   | 15 °                                                      |
| Beam angle              | 15°                                                       |
| LED service life (L70)  | 50000 h                                                   |
| Dimmable                | Two-stage                                                 |
| Features of color 1     | White, Permanently on, 700 lm                             |
| Special features        | Chemical-resistant<br>Wash down<br>Resistant to chemicals |


|                                  |             |
|----------------------------------|-------------|
| Electrical data                  |             |
| Operating voltage $U_o$          | 12...30 VDC |
| DC rated operating current $I_o$ | ≤ 850 mA    |
| Input power                      | 10.2 W      |

|                       |                      |
|-----------------------|----------------------|
| Mechanical data       |                      |
| Cascadable            | No                   |
| Design                | Rectangular, WLC90   |
| Housing material      | Metal, AL            |
| Window material       | Polycarbonate, clear |
| Electrical connection | Cable, 2 m, PVC      |
| Number of cores       | 4                    |
| Ambient temperature   | -40...+70 °C         |
| Storage temperature   | -40...+70 °C         |
| Protection class      | IP67<br>IP68<br>IP68 |

|                 |        |
|-----------------|--------|
| Tests/approvals |        |
| Approvals       | CE, UL |

- Operating voltage: 12...30 VDC
- Protection class IP67/IP69K
- Ambient temperature: -40 °C...+70 °C
- Window material: Polycarbonate
- Opening angle: 15°
- Mounted via 4 × 1/4"-20 UNC screws
- Color: White
- Internal temperature regulation
- Cable, 2 m, 4-pin, rear outlet

## Wiring Diagram

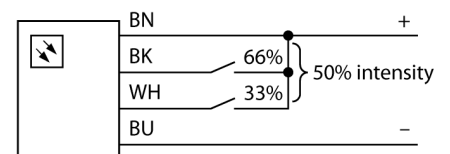

## Functional principle

The energy-efficient LED work lights are ideally suited for industrial applications. The color temperature lies in the range of daylight, between 6,000 and 7,100 Kelvin. The flux is 700 lumen. The device is immediately operational upon application of power (10..30 VDC).

## Luminous flux

The work lights are available with 8°, 15° and 30° aperture angle.

## Accessories

| Type code  | Ident no. |                                                                                                                        | Dimension drawing |
|------------|-----------|------------------------------------------------------------------------------------------------------------------------|-------------------|
| SMBAMS70AS | 3012127   | Mounting bracket, right-angled, stainless steel, for WLC90 work lights, screw kit included                             |                   |
| LMBWLC90PT | 3086466   | Mounting bracket, right-angled, stainless steel, two-part, two-way rotation, for WLC90 work lights, screw kit included |                   |