


CL50ZYALS3


LED Signal Light – Tower Light



Features

- LED tower light
- Individually controllable
- Mechanical screw-in thread M30 x 1.5
- Protection class IP67
- Acoustic signaller, pulsed (COL 2)
- Monochrome: Yellow (COL 1)
- Cable, 2m
- Operating voltage 85...264 VAC
- Beeper: Sealed, pulsed tone max. 94 dB

Wiring diagram

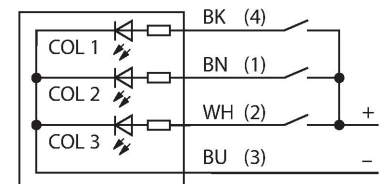

Functional principle

Multicolor/multifunction display
Rugged and well-priced LED tower, easy to install
Illuminated segments for clear operator guidance and display of system status.
Display of up to 3 colors.
Compact devices, no controller required
No mounting

Technical data

Type	CL50ZYALS3
ID	3088181
Signal and display data	
Purpose	LED indicator light
Function	Tower light
Light type	Yellow
LED service life (L70)	50000 h
Dimmable	No
Features of color 1	Yellow, Permanently on, 30 lm
Acoustic signal	Pulsed, 94 dB
Electrical data	
Operating voltage U_B	85...264 VAC
AC rated operational current	≤ 80 mA
Max. current consumption per color	60 mA
Max. current consumption of beeper	35 mA
Input type	AC
Response time typical	< 500 ms
Mechanical data	
Cascadable	No
Design	Smooth barrel, TL50
Dimensions	Ø 50 x 237.2 mm
Housing material	Plastic, ABS/Polycarbonate, Black
Window material	Polycarbonate, diffuse
Electrical connection	Cable, 2 m, PVC
Number of cores	4
Ambient temperature	-20...+50 °C

Technical data

Relative humidity	0...95 %
Protection class	IP67
Tests/approvals	
Approvals	CE, UL listed