



LED Signal Light Beacon with Audible Signal K50LRXALSXP



- LED all-round visible
- Continuous signal: 65dB
- Individually controllable
- Mechanical screw-in thread M30 x 1.5
- Protection class IP69K
- Monochrome: Red (COL 1)
- Cable, 2 m
- Operating voltage 12...30 VDC

Wiring Diagram

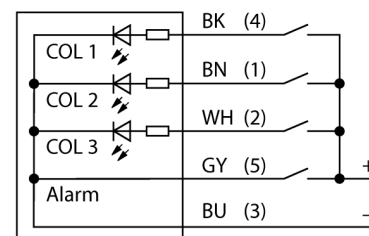

Functional principle

The LED is IP67 / IP69k rated and qualified for indoor and outdoor applications. Depending on the connection, one of the two colours lights steady for the duration of a PNP input signal.

Type	K50LRXALSXP
ID	3091254

Signal and display data	
Purpose	LED indicator light
Function	Spotlight
Light type	Red
Dimmable	No
Features of color 1	Red, Permanently on
Acoustic signal	Continuous tone, 94dB
Special features	Wash down

Electrical data	
Operating voltage U_o	12...30 VDC
DC rated operating current I_o	≤ 65 mA
Max. current consumption per color	35 mA
Max. current consumption of beeper	35 mA
Input type	PNP
Response time typical	< 1 ms

Mechanical data	
Cascadable	No
Design	Dome, K50L
Dimensions	Ø 50 x 62 mm
Housing material	Plastic, PC, Black
Window material	Polycarbonate, diffuse
Electrical connection	Cable, 2 m, PVC
Number of cores	5
Ambient temperature	-20...+50 °C
Relative humidity	0...95%
Protection class	IP67

Tests/approvals	
Approvals	CE, UL listed

Accessories

Type code	Ident no.		Dimension drawing
SMB30A	3032723	Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread	
SMB30SC	3052521	Mounting bracket, PBT black, for sensors with 30 mm thread, rotatable	