



LED Signal Light Tower Light CL50RWXAOSPQ

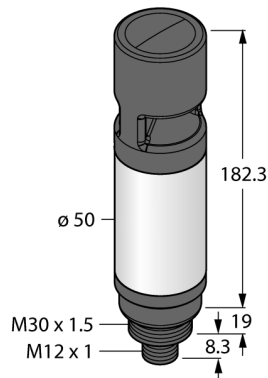

- LED tower light with beeper, omnidirectional
- Individually controllable
- Mechanical screw-in thread M30 x 1.5
- Protection class IP67
- Multicolor: Red (COL 1) / White (COL 2)
- Beeper: Omnidirectional, sealed, continuous tone max. 99 dB

Wiring Diagram

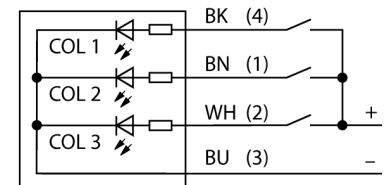

General description

Multicolor multifunction acoustic signaller
Rugged and well-priced LED tower, easy to install
Illuminated segments for clear operator guidance and display of system status.
Display of up to 3 colors.
Compact devices, no controller required
No mounting
The wiring diagram shows the PNP input configuration. An instruction leaflet with detailed information about the connection is included with the devices.

Type	CL50RWXAOSPQ
ID	3802504
Signal and display data	
Purpose	LED indicator light
Function	Tower light
Light type	Red White
Dimmable	No
Acoustic signal	Continuous tone, 99dB
Electrical data	
Operating voltage U_o	18...30 VDC
Input type	PNP
Response time typical	< 10 ms
Mechanical data	
Cascadable	No
Design	Cylindrical/Smooth, CL50
Dimensions	Ø 50 x 145.3 mm
Housing material	Plastic, ABS
Window material	Plastic, diffuse
Electrical connection	Connector, M12 × 1
Ambient temperature	-20...+50 °C
Protection class	IP67
Tests/approvals	
Approvals	CE, UL listed