
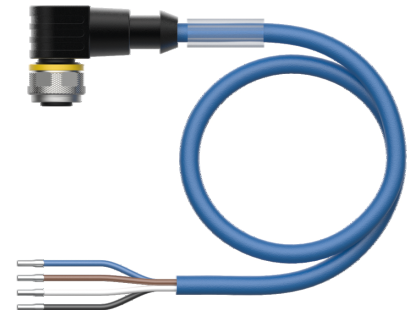


# WKC4.441T-25/TEB

## Actuator and Sensor Cable, PVC – Connection Cable

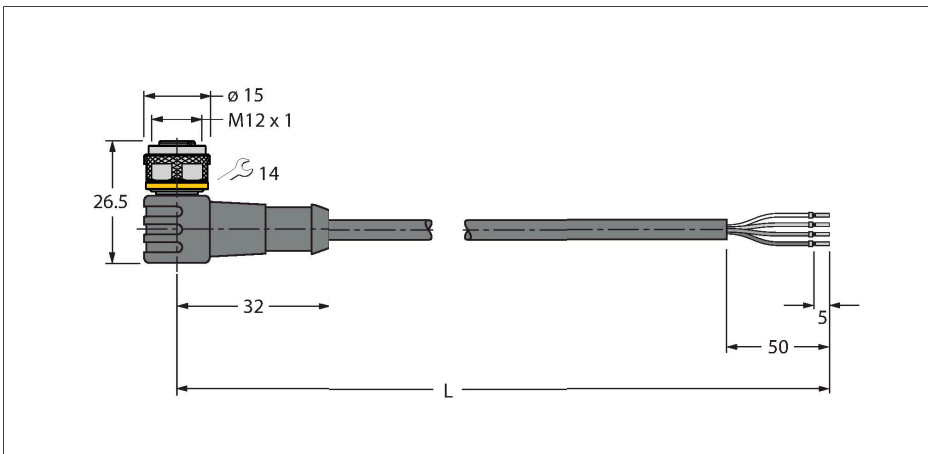

### Technical data


|                                 |                                        |
|---------------------------------|----------------------------------------|
| Type                            | WKC4.441T-25/TEB                       |
| ID                              | 6628456                                |
| Connector A                     | Female, M12 × 1, Angled, A-coded       |
| Number of pins                  | 4                                      |
| Contacts                        | Brass, CuZn, Gold-plated               |
| Contact carriers                | Plastic, TPU, Black                    |
| Connector body                  | Plastic, TPU, Black                    |
| Coupling nut/screw              | Brass, CuZn, Nickel-plated             |
| Seal                            | Plastic, FPM/FKM                       |
| Mechanical lifespan             | > 100 Mating cycles                    |
| Pollution degree                | 3                                      |
| Protection class                | IP67, IP69K, Only in screwed condition |
| Cable                           |                                        |
| Cable diameter                  | Ø 4.6 mm ±0.20                         |
| Cable length                    | 25 m                                   |
| Cable jacket                    | PVC, Blue                              |
| Core insulation                 | PVC                                    |
| Core cross-section              | 4 x 0.34 mm <sup>2</sup>               |
| Arrangement of strands          | 42 x 0.1 mm                            |
| Core colors                     | BN, WH, BU, BK                         |
| Electrical properties at +20 °C |                                        |
| Rated voltage                   | 250 V                                  |
| Test voltage                    | 2000 V                                 |
| Current                         | 4 A                                    |
| Insulation resistance           | > 30.5 MΩ/km                           |
| forward resistance              | max. 57 Ω/km                           |
| Nom. capacitance                | 0.49 pF/m                              |

### Features




- Female M12, angled, 4-pin
- Jacket material: PVC
- Jacket color: blue
- Flame retardant
- Resistant to chemicals and oils
- Resistant to microbes and hydrolysis
- LABS free
- Protection class: IP67, IP69K
- Cable length: 25 m

### Cable Cross-Section

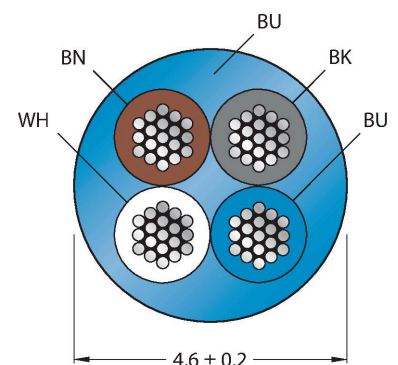


### Contact assignment



Technical data


|                                          |               |
|------------------------------------------|---------------|
| Nom. Inductance                          | 1.08 mH/km    |
| Mechanical and chemical properties       |               |
| Bending radius (stationary installation) | ≥ 5 x Ø       |
| Bending radius (flexible use)            | ≥ 10 x Ø      |
| Ambient temperature (fixed)              | -40...+105 °C |
| Ambient temperature (mobile)             | -5...+80 °C   |
| Approvals                                | cULus         |

Circuit Diagram




Accessories

HAS8141-06905406




Field-wireable male connector, M12 × 1, straight, 4-pin, insulation piercing connection, cable feedthrough 4.0 to 5.1 mm, core cross-section/terminal capacity 0.14 to 0.34 mm², plastic housing, metal nut

HAS8241-06905400




Field-wireable male connector, M12 × 1, angled, 4-pin, insulation piercing connection, cable feedthrough 4.0 to 5.1 mm, core cross-section/terminal capacity 0.14 to 0.34 mm², plastic housing, metal nut

BS8141-069010




Field-wireable male connector, M12 × 1, straight, 4-pin, screw terminal connection, cable feedthrough 4.0 to 6.0 mm, core cross-section/terminal capacity 0.14 to 0.75 mm², plastic housing, metal retaining screw

BS8241-069011




Field-wireable connector, M12 × 1, angled, 4-pin, screw terminal connection, cable feedthrough 4.0 to 6.0 mm, core cross-section/terminal capacity 0.14 to 0.75 mm², plastic housing, metal retaining screw

FW-ERSPM0426-SA-P-0408100002048




Field-wireable male connector, M12 × 1, straight, 4-pin, push-in connection, cable feedthrough 4.0 to 8.0 mm, core cross-section/terminal capacity 0.14 to 0.75 mm², plastic housing, metal retaining screw

FW-ERSPM0416-SA-S-0408100002288



Field-wireable male connector, M12 × 1, straight, 4-pin, screw terminal connection, cable feedthrough 4.0 to 8.0 mm, core cross-section/terminal capacity 0.25 to 1.5 mm², plastic housing, metal retaining screw

FW-EWSPM0416-SA-S-0408100002290




Field-wireable male connector, M12 × 1, angled, 4-pin, screw terminal connection, cable feedthrough 4.0 to 8.0 mm, core cross-section/terminal capacity 0.25 to 1.5 mm², plastic housing, metal retaining screw

TORQUE-WRENCH-SET-AS6936170


Torque wrench set; handles with adjustable torque 0.4-1.0 Nm, torque wrench for M8 (SW9), fork wrench for M12 (SW 14)

BLANK-LABEL-FOR-CORDSETS-TEL-TXL6936206

Label for TEL and TXL cables, length:  
18 mm, height: 4 mm, material:  
polycarbonate (PC), color: white,  
halogen-free and flame-retardant



Accessories

| Dimension drawing                                                                 | Type                  | ID        |                                                                                                                                                                            |
|-----------------------------------------------------------------------------------|-----------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | LABEL-HOLDER-FLEX-PVC | 100048170 | PVC label holder for identification of extension cables (TEL/TXL product series); for cable diameters: min. 5 mm; dimensions 4 × 18 mm; delivery unit: 50 pcs. per package |