
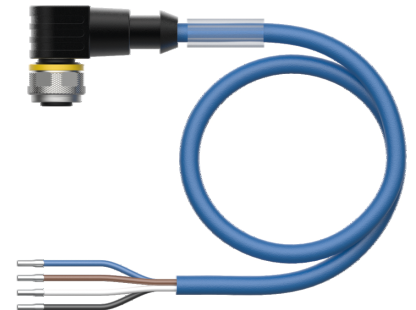


# WKC4.441T-5/TXB

## Actuator and Sensor Cable, PUR – Connection Cable

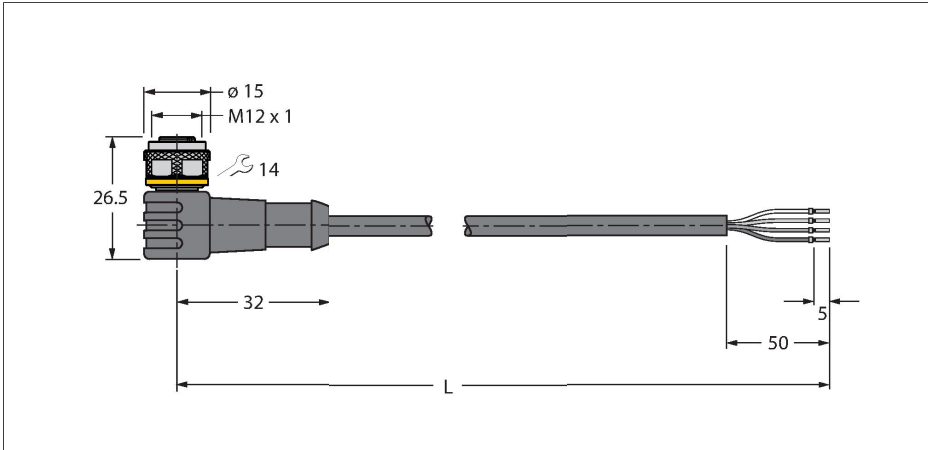

### Technical data


|                                 |                                        |
|---------------------------------|----------------------------------------|
| Type                            | WKC4.441T-5/TXB                        |
| ID                              | 6629390                                |
| Connector A                     | Female, M12 × 1, Angled, A-coded       |
| Number of pins                  | 4                                      |
| Contacts                        | Brass, CuZn, Gold-plated               |
| Contact carriers                | Plastic, TPU, Black                    |
| Connector body                  | Plastic, TPU, Black                    |
| Coupling nut/screw              | Brass, CuZn, Nickel-plated             |
| Seal                            | Plastic, FPM/FKM                       |
| Mechanical lifespan             | > 100 Mating cycles                    |
| Pollution degree                | 3                                      |
| Protection class                | IP67, IP69K, Only in screwed condition |
| Cable                           |                                        |
| Cable diameter                  | Ø 4.5 mm ±0.20                         |
| Cable length                    | 5 m                                    |
| Cable jacket                    | PUR, Blue                              |
| Core insulation                 | PP                                     |
| Core cross-section              | 4 x 0.34 mm <sup>2</sup>               |
| Arrangement of strands          | 42 x 0.1 mm                            |
| Core colors                     | BN, WH, BU, BK                         |
| Electrical properties at +20 °C |                                        |
| Rated voltage                   | 250 V                                  |
| Test voltage                    | 2000 V                                 |
| Current                         | 4 A                                    |
| Insulation resistance           | > 30.5 MΩ/km                           |
| forward resistance              | max. 57 Ω/km                           |

### Features



- Female M12, angled, 4-pin
- Jacket material: PUR
- Jacket color: blue
- Suitable for drag chain use
- Resistant to chemicals, UV radiation and oils
- Flame retardant (FT2 acc. to UL 1581, IEC 60332-2-2)
- Resistant to welding sparks
- Free from halogen, silicone, PVC and LABS
- Particularly resistant to abrasion
- Protection class: IP67, IP69K
- Cable length: 5.0 m

### Cable Cross-Section

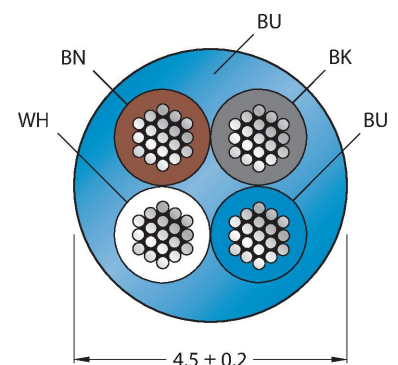

### Contact assignment

Technical data

| Mechanical and chemical properties       |                 |
|------------------------------------------|-----------------|
| Bending radius (stationary installation) | ≥ 5 x Ø         |
| Bending radius (flexible use)            | ≥ 10 x Ø        |
| Bending cycles                           | ≥ 5 million     |
| Admissible acceleration                  | max. 5 m/s²     |
| Admissible travel path, horizontal       | 5 m (at 5 m/s²) |
| Admissible travel path, vertical         | 2 m (at 5 m/s²) |
| Admissible traversing speed              | 3.3 m/s         |
| Torsional stress                         | ± 180 °/m       |
| Ambient temperature (fixed)              | -50...+80 °C    |
| Ambient temperature (mobile)             | -25...+80 °C    |
| Ambient temperature (drag chain)         | -25...+60 °C    |
| Approvals                                | cULus           |



Circuit Diagram



Accessories

TORQUE-WRENCH-SET-AS6936170

Torque wrench set; handles with adjustable torque 0.4-1.0 Nm, torque wrench for M8 (SW9), fork wrench for M12 (SW 14)

BLANK-LABEL-FOR-CORDSETS-TEL-TXL6936206

Label for TEL and TXL cables, length: 18 mm, height: 4 mm, material: polycarbonate (PC), color: white, halogen-free and flame-retardant



HAS8141-06905406

Field-wireable male connector, M12 × 1, straight, 4-pin, insulation piercing connection, cable feedthrough 4.0 to 5.1 mm, core cross-section/terminal capacity 0.14 to 0.34 mm², plastic housing, metal nut

HAS8241-06905400

Field-wireable male connector, M12 × 1, angled, 4-pin, insulation piercing connection, cable feedthrough 4.0 to 5.1 mm, core cross-section/terminal capacity 0.14 to 0.34 mm², plastic housing, metal nut

BS8141-069010


Field-wireable male connector, M12 × 1, straight, 4-pin, screw terminal connection, cable feedthrough 4.0 to 6.0 mm, core cross-section/terminal capacity 0.14 to 0.75 mm², plastic housing, metal retaining screw

BS8241-069011

Field-wireable connector, M12 × 1, angled, 4-pin, screw terminal connection, cable feedthrough 4.0 to 6.0 mm, core cross-section/terminal capacity 0.14 to 0.75 mm², plastic housing, metal retaining screw

## FW-ERSPM0426-SA-P-0408


100002048



Field-wireable male connector, M12 × 1, straight, 4-pin, push-in connection, cable feedthrough 4.0 to 8.0 mm, core cross-section/terminal capacity 0.14 to 0.75 mm<sup>2</sup>, plastic housing, metal retaining screw

## FW-ERSPM0416-SA-S-0408


100002288



Field-wireable male connector, M12 × 1, straight, 4-pin, screw terminal connection, cable feedthrough 4.0 to 8.0 mm, core cross-section/terminal capacity 0.25 to 1.5 mm<sup>2</sup>, plastic housing, metal retaining screw

## FW-EWSPM0416-SA-S-0408

100002290



Field-wireable male connector, M12 × 1, angled, 4-pin, screw terminal connection, cable feedthrough 4.0 to 8.0 mm, core cross-section/terminal capacity 0.25 to 1.5 mm<sup>2</sup>, plastic housing, metal retaining screw

## Accessories

| Dimension drawing                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Type                  | ID                                                                                                                                                                                          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>The technical drawing shows two views of the PVC label holder. The top view is a rectangle with overall dimensions of 18 mm by 4 mm. It features a central rectangular cutout with a width of 6 mm and a height of 2 mm. There are also smaller rectangular features on the sides, each with a width of 2 mm and a height of 1 mm. The side view shows the profile of the holder, which has a total thickness of 1.5 mm. The central cutout has a depth of 0.5 mm.</p> | LABEL-HOLDER-FLEX-PVC | 100048170<br><br>PVC label holder for identification of extension cables (TEL/TXL product series); for cable diameters: min. 5 mm; dimensions 4 × 18 mm; delivery unit: 50 pcs. per package |