


# WKCV4.4T-P7X2-10/TFW

## Actuator And Sensor Cable, PP-EPDM – Connection Cable




### Features

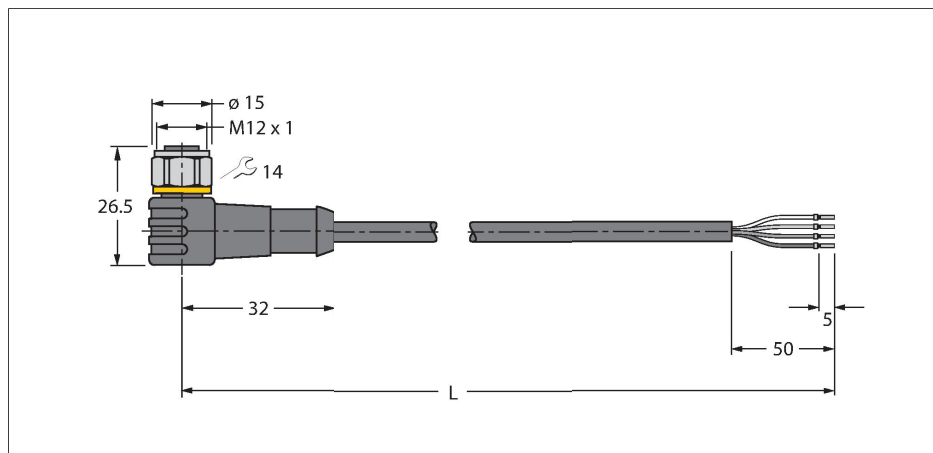


- M12 female connector, angled, 4-pin
- With 2-color LED (PNP, yellow, green)
- Stainless steel coupling nut/screw
- Sheath material: PP-EPDM
- Sheath color: white
- Resistant to acids and alkaline solutions
- Resistant to detergents and disinfectants
- Resistant to hydrolysis acc. to DIN EN 60068-2-78
- Free from silicone and PVC
- Halogen-free acc. to DIN EN 50267-2-1, IEC 60754-1, VDE 0482-267-2-1
- Approvals: Ecolab, FDA
- RoHS and REACH compliant
- Protection classes IP67, IP69K
- Cable length: 10 m

### Cable Cross-Section



### Contact assignment



### Technical data

|                                 |                                                            |
|---------------------------------|------------------------------------------------------------|
| Type                            | WKCV4.4T-P7X2-10/TFW                                       |
| ID                              | 6934667                                                    |
| Connector A                     | Female, M12 × 1, Angled                                    |
| Number of pins                  | 4                                                          |
| Contacts                        | Brass, CuZn, Gold-plated                                   |
| Contact carriers                | Plastic, PP, White                                         |
| Connector body                  | Plastic, PP, Translucent                                   |
| Coupling nut/screw              | Stainless Steel, V4A                                       |
| Seal                            | Plastic, FPM/FKM                                           |
| Tightening torque (range)       | 0.8 ... 1 Nm<br>(observe max. torque of mating connector!) |
| LED display                     | dual LED                                                   |
| Display operating voltage       | LED, Green                                                 |
| Display switch state            | LED, Yellow                                                |
| Mechanical lifespan             | > 100 Mating cycles                                        |
| Pollution degree                | 3                                                          |
| Protection class                | IP67, IP69K, Only in screwed condition                     |
| Cable                           |                                                            |
| Cable diameter                  | Ø 4.4 mm ±0.20                                             |
| Cable length                    | 10 m                                                       |
| Cable jacket                    | PP-EPDM, White                                             |
| Core insulation                 | PE                                                         |
| Core cross-section              | 4 x 0.34 mm²                                               |
| Arrangement of strands          | 42 x 0.1 mm                                                |
| Core colors                     | BN, WH, BU, BK                                             |
| Electrical properties at +20 °C |                                                            |
| Rated voltage                   | 30 V                                                       |

Technical data

|                                          |               |
|------------------------------------------|---------------|
| Test voltage                             | 500 V         |
| Current                                  | 4 A           |
| forward resistance                       | max. 57 Ω/km  |
| Mechanical and chemical properties       |               |
| Bending radius (stationary installation) | ≥ 5 x Ø       |
| Bending radius (flexible use)            | ≥ 10 x Ø      |
| Ambient temperature (fixed)              | -40...+105 °C |
| Ambient temperature (mobile)             | 0...+80 °C    |

Accessories

|                                                                                                                       |         |
|-----------------------------------------------------------------------------------------------------------------------|---------|
| TORQUE-WRENCH-SET-AS                                                                                                  | 6936170 |
| Torque wrench set; handles with adjustable torque 0.4-1.0 Nm, torque wrench for M8 (SW9), fork wrench for M12 (SW 14) |         |

Circuit Diagram

