


# RKSV4.4T-5/TFW

## Actuator And Sensor Cable, PP-EPDM – Connection Cable



### Features

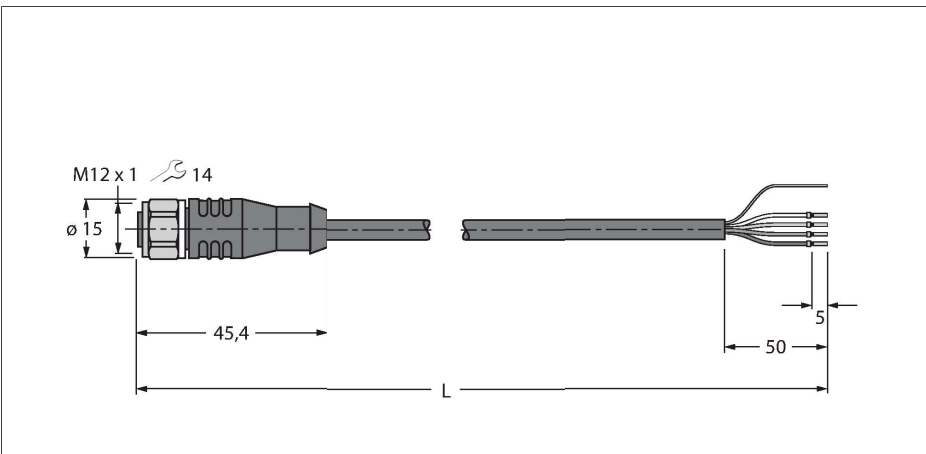


- M12 female connector, straight, 4-pin
- Stainless steel coupling nut/screw
- Sheath material: PP-EPDM, shielded
- Sheath color: white
- Resistant to acids and alkaline solutions
- Resistant to detergents and disinfectants
- Resistant to hydrolysis acc. to DIN EN 60068-2-78
- Free from silicone and PVC
- Halogen-free acc. to DIN EN 50267-2-1, IEC 60754-1, VDE 0482-267-2-1
- Approvals: Ecolab, FDA
- RoHS and REACH compliant
- Protection classes IP67, IP69K
- Cable length: 5.0 m


### Technical data

|                                 |                                                            |
|---------------------------------|------------------------------------------------------------|
| Type                            | RKSV4.4T-5/TFW                                             |
| ID                              | 6934811                                                    |
| Connector A                     | Female, M12 × 1, Straight                                  |
| Number of pins                  | 4                                                          |
| Contacts                        | Brass, CuZn, Gold-plated                                   |
| Contact carriers                | Plastic, PP, White                                         |
| Connector body                  | Plastic, PP, White                                         |
| Coupling nut/screw              | Stainless Steel, V4A                                       |
| Seal                            | Plastic, FPM/FKM                                           |
| Tightening torque (range)       | 0.8 ... 1 Nm<br>(observe max. torque of mating connector!) |
| Mechanical lifespan             | > 100 Mating cycles                                        |
| Pollution degree                | 3                                                          |
| Protection class                | IP67, IP69K, Only in screwed condition                     |
| Cable                           |                                                            |
| Cable diameter                  | Ø 4.7 mm ±0.20                                             |
| Cable length                    | 5 m                                                        |
| Cable jacket                    | PP-EPDM, White                                             |
| Shielding                       | Aluminum/Polyester foil                                    |
| Core insulation                 | PE                                                         |
| Core cross-section              | 4 x 0.34 mm <sup>2</sup>                                   |
| Arrangement of strands          | 42 x 0.1 mm                                                |
| Core colors                     | BN, WH, BU, BK                                             |
| Electrical properties at +20 °C |                                                            |
| Rated voltage                   | 250 V                                                      |
| Test voltage                    | 500 V                                                      |
| Current                         | 4 A                                                        |


### Cable Cross-Section

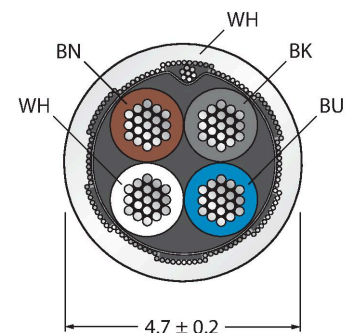

### Contact assignment



### Circuit Diagram



## Technical data

forward resistance max. 57  $\Omega$ /km

### Mechanical and chemical properties

Bending radius (stationary installation)  $\geq 5 \times \varnothing$

Bending radius (flexible use)  $\geq 10 \times \varnothing$

Ambient temperature (fixed) -40...+105 °C

Ambient temperature (mobile) 0...+80 °C

## Accessories

TORQUE-WRENCH-SET-AS 6936170

Torque wrench set; handles with adjustable torque 0.4-1.0 Nm, torque wrench for M8 (SW9), fork wrench for M12 (SW 14)