



Actuator and Sensor Cable
Verbindungsleitung
RSM RKM 40-2M/S101

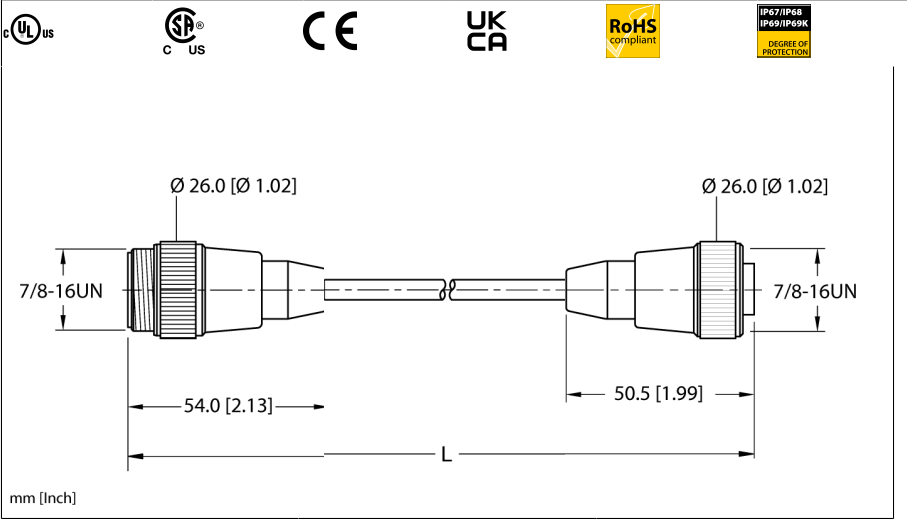


- 7/8" male connector, straight, 4-pin
- 7/8" minifast female connector, straight
- TPE jacket, yellow, 4 × 18 AWG
- -40 °C cold bending strength
- Fire classes: UL1061, CSA FT1
- Flexlife and C-Track approved

Type	RSM RKM 40-2M/S101
ID	U0981-54
Connector A	Male, 7/8"-16 UN, Straight
Number of pins	4
Contact carriers	Plastic, TPU, Yellow
Connector body	Plastic, TPU, Yellow
Coupling nut/screw	Brass, CuZn, Nickel-plated
Tightening torque	2 Nm
Mechanical lifespan	> 100 Mating cycles
Pollution degree	3
Protection class	IP67, IP68, IP69, IP69K
	NEMA: 1, 3, 4, 6P, 12
Connector B	Female, 7/8"-16 UN, Straight
Number of Pins	4
Contact carriers	Plastic, TPU, Yellow
Connector body	Plastic, TPU, Yellow
Coupling nut/retaining screw	Brass, CuZn, Nickel-plated
Tightening torque	2 Nm
Mechanical life	> 100 Mating cycles
Pollution degree	3
Protection class	IP67, IP68, IP69, IP69K
	NEMA: 1, 3, 4, 6P, 12

Cable

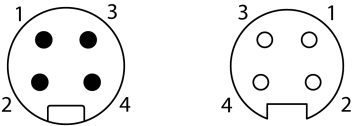

Circuit Diagram



Cable ID	RF50968
Number of cores	4
Cable diameter	Ø 6.2mm
Cable length	2 m, (+ 50 mm or 4 % of the length/-0.0, depending on which value is larger) m
Cable jacket	TPE, Yellow
Conductor diameter	0.066 "
Conductor material	TC (tinned copper)
Core insulation	TPC-ET
Core cross-section	4 x 18 AWG [Similar to 0.75 mm²]
Arrangement of strands	65 x 36AWG
Core colors	BN, WH, BU, BK

Electrical properties at +20 °C

Rated voltage	600V
Current	9AA

Mechanical and chemical properties

Bending radius (stationary installation)	≥ 5 x Ø
Bending radius (flexible use)	≥ 10 x Ø
Torsion cycles	Max. 20 million
Cold flexural strength	-40 °C
Bending cycles 10 x Ø	20 million cycles
	When correctly installed at 20 °C, 50 % RH and a cycle speed of ≤ 0.5 cycles per second.
C-track	Yes
Ambient temperature (fixed)	-40...+105°C
Ambient temperature (mobile)	5...+105°C
Ambient temperature during installation	-10...+105 °C

Approval

Note

Using the cable in extreme temperatures, when it is exposed to certain chemicals and above the nominal cycle speed or below the nominal bending radius of the cable can reduce the flexural strength.

- We reserve the right to make technical modifications without prior notice.