


Technical data

Core colors	BK1, BK2, BK3, GNYE
Electrical properties at +20 °C	
Rated voltage	600 V
Current	12 A
Mechanical and chemical properties	
Ambient temperature (fixed)	-40...+85 °C
Approvals	cULus recognized
Note	
CAUTION: RISK OF ELECTRIC SHOCK! DO NOT DISCONNECT UNDER LOAD!	
- The standard right-angled connection cable runs perpendicular to the flat surfaces of the mounting hole.	
- We reserve the right to make technical modifications without prior notice.	

Through bore



Threaded bore

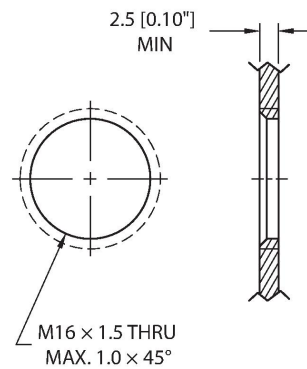

Front panel mounting



Derating curve

