
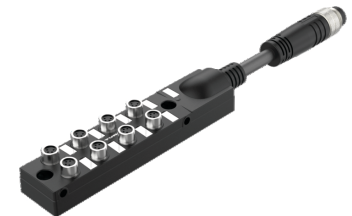


TB-8M8M-4-5-BSM19

Passive Actuator/Sensor Junction Box, 8 Ports – M8 × 1 I/O Port with Integral Homerun Cable

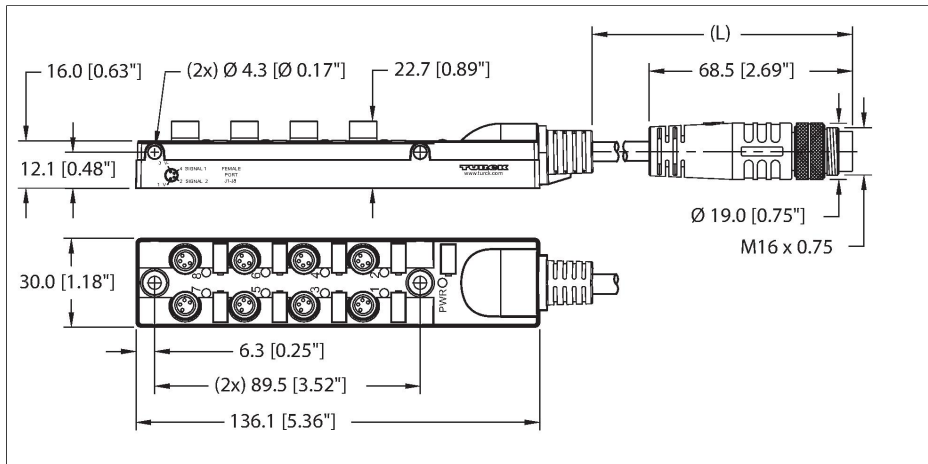


Technical data

Type	TB-8M8M-4-5-BSM19
ID	UX09108
Distributed I/O	Junction box, 8, With a permanently installed M16 male connector
Housing	Plastic, PA 6 GF30, Black
I/O port	Female, M8 × 1
Design specification	acc. to IEC 61076-2-104
Number of Pins	4
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, PA 4.6 GF30, Black
Seal	O ring, Plastic, FKM/FPM
Flange housing	Brass, CuZn, Nickel-plated
Mechanical lifespan	> 100 Mating cycles
Pollution degree	3
Protection class	IP67, IP68, IP69, IP69K
	NEMA: 1, 3, 4, 6P, 12
Group terminal	Connectors, M16 × 1 with cable, Side output
Connector B	M16 × 0.75, Straight
Number of pins	19
Contacts	Brass, CuSn, Gold-plated
Contact carriers	Plastic, TPU, Black
Connector body	Plastic, TPU, Yellow
Coupling nut/retaining screw	Brass, CuZn, Nickel-plated
Mechanical life	> 100 Mating cycles
Pollution degree	3

Features

- CE RoHS compliant
- IP67/IP68 IP69K
- Housing material: Nylon
- Housing color: black
- Protection class IP67
- RoHS conform
- cULus listed
- I/O port (number of pins): 3-pin + PE
- Instrumentation Tray Cable
- PVC jacket, black, shielded, 19 × 22 AWG
- UV resistant
- 40 °C cold bending strength
- Oil resistant
- Fire classes: UL 1685 FT4, UL1061, CSA FT4
- Cable length: 5 m

Cable Cross-Section

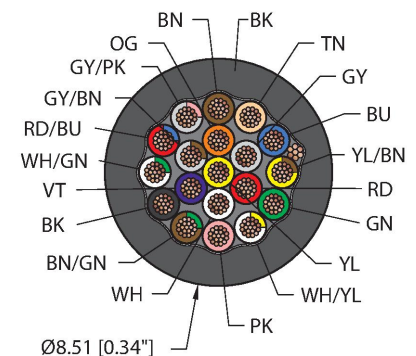


Contact assignment

Technical data

I/O connector

Permanently installed male con

Protection class	IP67
Cable	
Cable ID	RF50995
Number of cores	19
Cable diameter	Ø 8.51 mm
Cable length	5 m, (+ 50 mm or 4 % of the length/-0.0, depending on which value is larger)
Cable jacket	PVC, Black
Shielding	Aluminum/polyester (IN)
Drain wire cross section	24 AWG, TC (tinned copper)
Conductor diameter	0.048 "
Conductor material	TC (tinned copper)
Core insulation	SR-PVC
Core cross-section	19 x 22 AWG [Similar to 0.34 mm²]
Arrangement of strands	19 x 0.0058 "
Core colors	YL, OG, GY, RD, WH, VT, GY/BN, RD/BU, GY/PK, BN, TN, BU, YL/BN, GN, WH/YL, PK, BN/GN, BK, WH/GN
Electrical properties at +20 °C	
Rated voltage	30 VDC
Current	2 A per signal contact, total current 6 A
Mechanical and chemical properties	
Bending radius (stationary installation)	≥ 5 x Ø
Bending radius (flexible use)	≥ 15 x Ø
Cold flexural strength	-40 °C
Ambient temperature range (stationary)	-40 °C...+85 °C
Ambient temperature range (In motion)	5 °C...+85 °C
Ambient temperature during installation	-10 °C...+85 °C
Approval	
Approvals	CE RoHS
Note	
Using the cable in extreme temperatures, when it is exposed to certain chemicals and above the nominal cycle speed or below the nominal bending radius of the cable can reduce the flexural strength.	
- We reserve the right to make technical modifications without prior notice.	



Scope of delivery

Device	Quantity	Description
Junction boxes	1	Passive actuator/sensor junction box
VS-M12-BK	2	Closure caps for M12 female connectors
KS9/20	5	Labels

Accessories

Ident-No.	Designation	Description
6900197	CK12-0	Field-wireable female M23, 12-pin, straight
6931889	CS12-0	Field-wireable male M23, 12-pin, straight
6931780	CKCM12-11-5/S90	Connection cable, M23 female, straight, 12-pin, 5 m*
6931781	CKCM12-11-10/S90	Connection cable, M23 female, straight, 12-pin, 10 m*
6931885	CKCWM12-11-5/S90	Connection cable, M23 female, angled, 12-pin, 5 m*
6931886	CKCWM12-11-10/S90	Connection cable, M23 female, angled, 12-pin, 10 m*
6931782	CSCM-CK-CM12-11-5/S90	Extension cable, male M23 - female M23, straight, 12-pin, 5 m *
6931783	CSCM-CK-CM12-11-10/S90	Extension cable, male M23 - female M23, straight, 12-pin, 10 m *
6931887	CSCM-CK-CWM12-11-5/S90	Extension cable, male M23 straight - female M23 angled, 12-pin, 5 m *
6931888	CSCM-CK-CWM12-11-10/S90	Extension cable, male M23 straight - female M23 angled, 12-pin, 10 m *
6625616	RKC5T-2-RSC5T/TXL	Actuator/sensor cable, female M12 - male M12, straight, 5-pin, 2 m *
6936055	VS-M12-BK	Closure caps for M12 female connectors
8015002	KS9/20	Labels

* Other lengths available on request

Circuit Diagram

