


Accessoires

Smart Plug


convertisseur NPN en PNP

SPN1-AN6-ARP6X



- adaptateur universel pour le raccordement de détecteurs standard
- mode de protection IP67
- M12 x 1 4 pôles; connecteur femelle
- M12 x 1 4 pôles; connecteur mâle

Schéma de raccordement

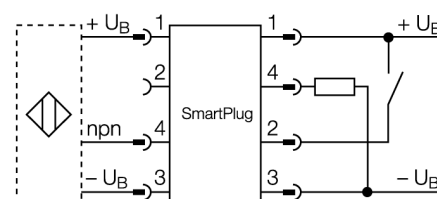

Principe de fonctionnement

L'inverseur SmartPlug SPN1-AN6-ARP6X convertit le signal du détecteur raccordé de NPN en PNP. La fonction de sortie peut en outre être commutée (N.O/N.C) moyennant la ligne de commande.

Type	SPN1-AN6-ARP6X
N° d'identification	A0604
Tension de service U_s	10...30 VDC
Fonction de sortie	4 fils
Classe de protection	□
Dimensions	60 mm
Matériau de boîtier	Plastique, PBTP
Température ambiante	0...+60 °C
Mode de protection	IP67

Accessoires de fonction

Type	No. d'identité		Dimensions
VB2-SP1	A3501-29	adaptateur d'apprentissage	Technical drawing of the VB2-SP1 adapter. The top view shows a circular base with a central hole of diameter 4.5 mm and an outer diameter of 8 mm. The base has a diameter of 23 mm. Two mounting holes are spaced 38 mm apart. Two cables are connected to the base: one labeled P1 with a length of 0.2 m and a connector of M12 x 1, and another labeled J1 with a length of 42.5 mm and a connector of M12 x 1. The distance from the center of the base to the center of the J1 connector is 18 mm. The distance from the center of the base to the center of the P1 connector is 13 mm. The distance from the center of the base to the center of the J1 connector is 12.7 mm. The side view shows a cylindrical body with a diameter of 14.5 mm and a length of 20 mm.

