


Przetwarzanie obrazu


Camera P3

PPROCAM1.3SR-P

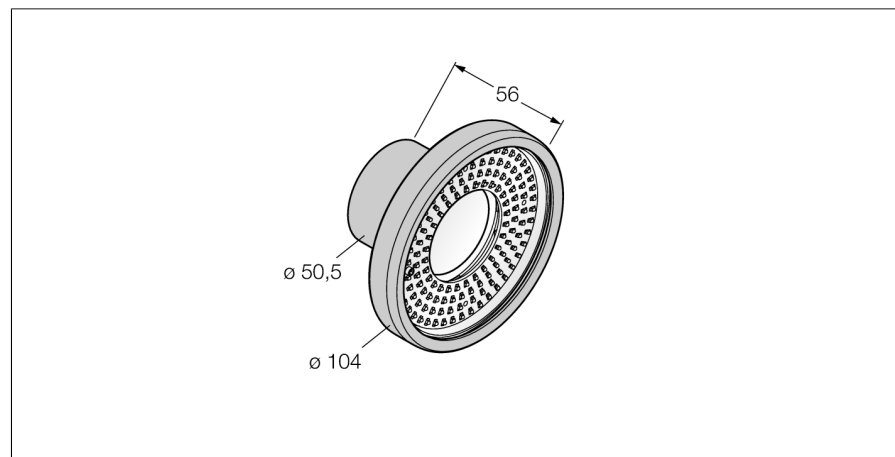

- Compact camera with integrated ring light
- Housing material aluminium
- Plastic inspection window
- Protection class IP68
- Lens to be ordered separately
- Separate controller required, type PPROC-TL
- 2/3" CMOS, 752x480 pikseli
- 256-stopniowa skala szarości

Schemat podłączenia

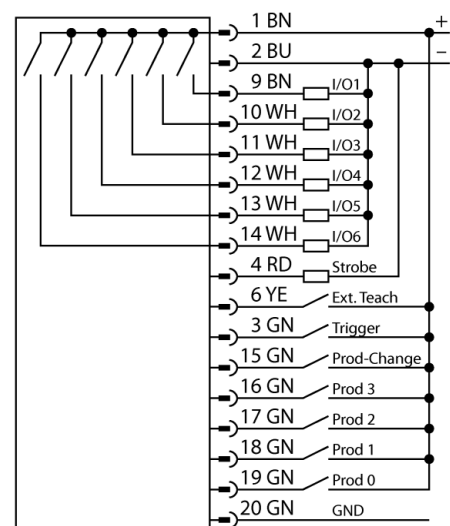

Zasada działania

The image processing system PresencePLUS PRO consists of the compact camera and the processing unit incorporated in a separate controller. Lens, external/internal lighting and connection cable are to be ordered separately. Freeware and firmware updates are available for download on:

www.bannerengineering.com

Typ	PPROCAM1.3SR-P
Nr kat.	3077047
Dane kamery	
Resolution	1280 × 1024 piksele
Rodzaj światła	czerwony
Długość fali	620...630 nm
Prąd znamionowy DC I_a	
	≤ 550 mA
Dane mechaniczne	
Wymiary	Ø 104 x 143.3 mm
Materiał obudowy	Aluminium
Window material	akryl, przezroczysty
Temperatura pracy	0...+50 °C
Stopień ochrony	IP68
Testy/aprobaty	
Certyfikaty	CE