



Safety Light Curtain Emitter/Receiver Pair Integrated Muting Function SLPMP14-1110P128

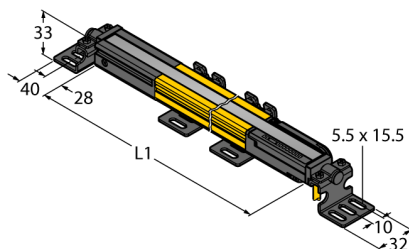

- Cable with male end M12 x 1, 8-pin, 300 mm
- Protection class IP65
- Flat housing without blind zone
- Adjustments via DIP switch
- Resolution can be reduced
- Blanking function
- Operating voltage: 24 VDC $\pm$ 15 %
- Resolution 14 mm
- Scan field 1110 mm (L1)
- Mounting bracket included in delivery

Wiring Diagram

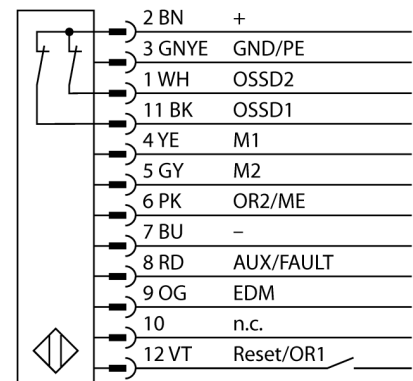

Functional principle

The high-resolution safety light screen is emitter and receiver in one without blind zone. As the system is optically synchronized, emitter/receiver wiring is superfluous. The receiver's safety switching outputs are directly connected to a load relay (e.g. IM-T-9A) and trigger an immediate stop of dangerous machine cycles. Personnel safety category PLe acc. to ISO 13849-1 is fulfilled through 2-channel monitoring of the switching device and the principle of diverse redundancy by which two processors control each other mutually.

Type	SLPMP14-1110P128
ID	3084480
Optical data	
Function	Light screen
Light type	IR
Wavelength	850 nm
Optical resolution	14 mm
Range	0...7000 mm
Scan field	1110 mm
Number of beams	111
With muting function	Yes
Scan Code	Adjustable
Electrical data	
Operating voltage U_s	20...28 VDC
Residual ripple	< 10 % U_s
DC rated operating current I_s	$\leq$ 210 mA
No-load current I_o	$\leq$ 275 mA
Max. current safe output	500 mA
Short-circuit protection	yes
Reverse polarity protection	yes
Output function	2 x NC contact, 2 x PNP
Number of safe semiconductor outputs	2
Insulation class	III
Response time typical	< 28.5 ms
With restart interlock	yes
Blanking function	yes

Mechanical data	
Design	Rectangular, EZ-Screen LP
Housing material	Metal, AL, Yellow polyester
Lens	plastic, Acryl
Cascadable	No
Electrical connection	Cable with connector, M12 × 1, 0.3 m
Ambient temperature	0...+55 °C
Protection class	IP65
Power-on indication	LED, Green
Switching state	2-color LED, Red
Tests/approvals	
Vibration resistance	10–55 Hz at 0.35 mm
Shock test	10 g at 16 ms (6000 cycles)
Approvals	CE, cTUVus